


LV345T

LOW VOLTAGE TRANSFORMER

INPUT: 120 VOLTS, 60 HZ. 1.0 AMP. MAX.

OUTPUT: 12 VOLTS UP TO 88 LAMP WATTS MAX.

FOR USE WITH LOW VOLTAGE FIXTURES. TOTAL WATTAGE NOT TO EXCEED 88 NOMINAL WATTS. (NUMBER OF LIGHTS X WATTAGE OF EACH LIGHT • NOMINAL WATTS.)

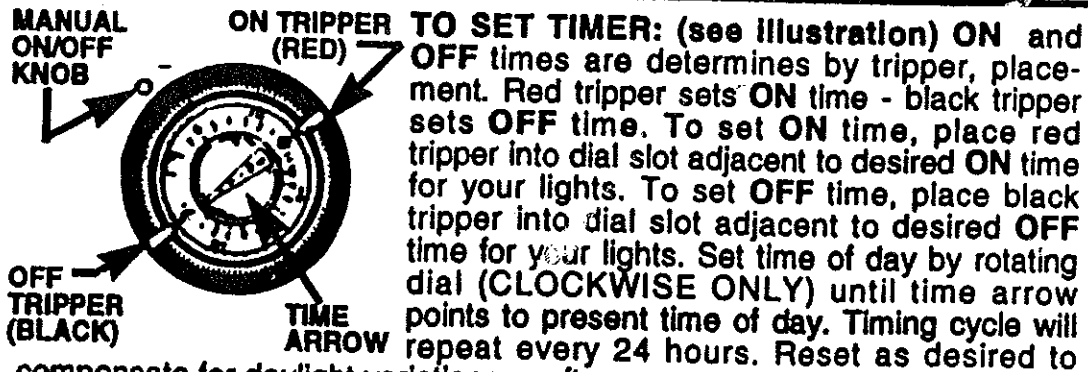

compensate for daylight variations or after power outage.

For early ON or OFF operation, turn manual knob counterclockwise to desired ON or OFF position. Timer will resume standard timing cycle at next scheduled change.

WHEN OUTDOORS INSTALL NO LESS THAN 1 FOOT (30 CM) ABOVE GROUND. KEEP COVER CLOSED AT ALL TIMES. DO NOT SUBMERGE LIGHTING UNITS. REPLACE BURNED OUT BULBS PROMPTLY.

CAUTION: IF LIGHTS CYCLE ON/OFF OVER A SHORT DURATION CHECK ALL CONNECTIONS FOR FAULT.

UL LISTED
493R

158LV8421

INTERMATIC INCORPORATED
SPRING GROVE, ILLINOIS 60081-9698

CS LR42620

PRINTED IN U.S.A.