



SOUND ACTIVATED SECURITY WALL PLUG II SX530

Suggested Applications

● HOME SECURITY.

In hallways, garages, anywhere a burglar is likely to enter. Many studies show that light is an effective burglar deterrent. But lights which indicate inside activity are the most effective in keeping burglars away. Unlike timers which turn lights on and off predictably. The SX530 simulates activity realistically and keeps burglars away more effectively.

● SAFETY

In entryways, stairways or in the garage where walking in the dark can be hazardous.

CONVENIENCE.

Because SX530 is Sound-Activated, it eliminates the need for touching a light switch. You'll never have to grope in the dark for a light switch again.

ENERGY SAVINGS.

The SX530 turns your lights off automatically when no longer needed.

Installation

The SX530 requires no wiring. Especially convenient for use with floor or table lamps, the SX530 merely plugs into any standard wall outlet.

Because electric codes governing polarized plugs vary from State to State, in some geographical areas it may be necessary to insert your SX530 in inverted position. This has no effect whatsoever on the operation of the unit.

Operation

The SX530 features simple and convenient **Security** (sound-activated) operation. In this mode, it will turn on and off any light plugged into it by sound alone. For **Manual** "ON" or "OFF" settings, simply position the slider switch at HIGH for "ON" or LOW for "OFF". The slider must be moved away from the HIGH or LOW position to return the SX530 to sound-activated Mode.

NOTE: The SX530 should be used only for electric lights of 300W or less, and cannot be used for any device that is motor driven or includes a heating element. Improper use will void Warranty.


Settings

The SX530 should be set to the requirements of its location. It is provided with a Sensitivity Adjustment Control as well as an LED Setting Guide. When setting sensitivity, we suggest you simulate the sound level to which you want your SX530 to respond. Simply move the slider switch towards LOW or HIGH

until the LED Setting Guide blinks brightly. Once you have set your sensitivity level no further adjustments are required. The built-in Automatic Timing Circuit (ATC) conveniently regulates shut-off time automatically.

AUTOMATIC TIMING CIRCUIT (ATC)

The SX530 features a preset Automatic Timing Circuit (ATC) which eliminates the need for timing adjustments. In the presence of sound the SX530 will turn the light ON for several minutes. The shut-off time depends upon the type of sound and its duration. If no further sound is sensed the unit will turn the light OFF at the end of its timing period.

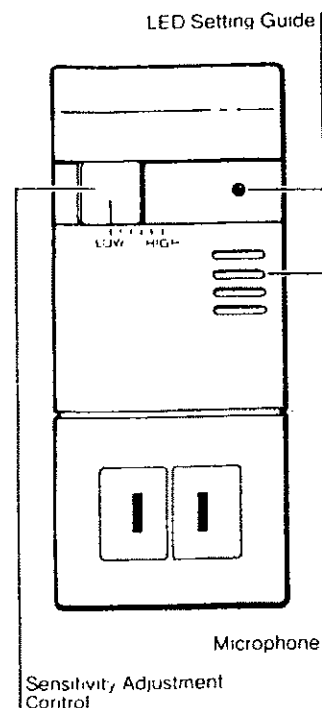

FULL ONE YEAR WARRANTY

If within one (1) year from the date of purchase, this product fails due to a defect in material or workmanship, Intermatic Incorporated will repair or replace it free of charge.

The warranty does not apply to: (a) damage caused by accident, abuse, mishandling, dropping; (b) units which have been subject to unauthorized repair, opened, taken apart; (c) units not used in accordance with directions; (d) **damages exceeding the cost of the product**. Some states do not allow a limitation of damages, so the foregoing limitation may not apply to you. This warranty gives you specific legal rights, and you may also have rights which vary from state to state.

This warranty service is available by either (a) returning the product to the dealer from whom the unit was purchased, or (b) mailing postage prepaid to the nearest authorized service station. Please be sure to wrap the product securely when mailing to avoid shipping damage. This warranty is made by: Intermatic Incorporated, Spring Grove, Illinois 60081-9698.

SOUND ACTIVATED SECURITY WALL SWITCH SOUND ACTIVATED LIGHT CONTROLS

SX320 Wall Switch II




- 3-Position switch: Manual Off, Automatic (Sound-operated), Manual On
- Adjustable Time and Sensitivity settings
- LED setting guide. Settings tamper-proof when switch plate is in place
- For energy savings. Auto/Sound setting operates lights at 1/2 power
- Simple installation
- Maximum rating: 200W

SX530 Plug II

- Plugs into any standard outlet
- No installation, no tools required
- Slide switch sets sensitivity
- Maximum rating: 300W

SX740 Socket

- Screws into any standard US lamp socket
- Converts any fixture to sound activation without any additional switch
- Ideal for use in outdoor locations
- Adjustable sensitivity setting. Light sensor avoids accidental triggering in daylight
- Maximum rating: 150W

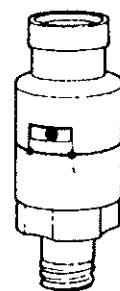

INTERMATIC INCORPORATED
SPRING GROVE, ILLINOIS 60081-9698