

3.125 ±.06

# RC2103S

## AIR ACTUATED REMOTE CONTROL

Rainproof (TYPE 3R) Enclosure

for Indoor/Outdoor use.

Single Pole Single Throw (ON/OFF)

1 HP/2 HP 120/240 VAC, Max. 16A/12A


20A. "RES." - 120/240 VAC

Maximum running load not to exceed 16 AMP.

### **DANGER**

RISK OF ELECTRICAL SHOCK. DISCONNECT  
ELECTRICITY BEFORE REMOVING THIS COVER  
OR SERVICING THE EQUIPMENT THIS DEVICE  
CONTROLS.

Install at least 5 ft.  
from inside edge of  
water with conduit  
openings facing down.  
Use copper conductors  
only. Min 75°C insulation.

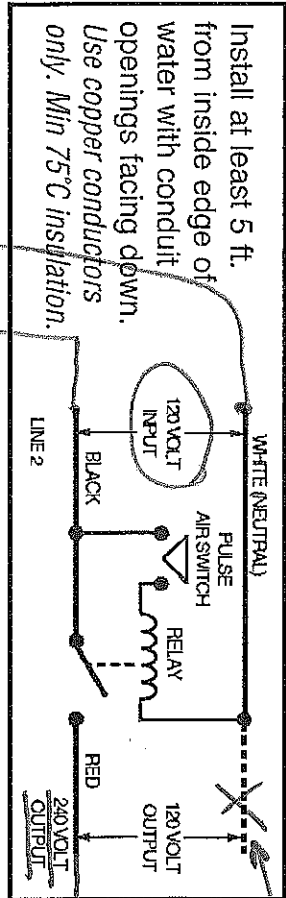

**INTERMATIC INCORPORATED**  
SPRING GROVE, IL 60081-9698  
154-00716



Breaker  
Panel

From  
Service

240VAC

Neutral

240 VAC

Neutral Bar

3.375 ±.06

120 VAC Input is  
1/2 of 240 when neutral  
wire is part of circuit.

Not Used In 240 VAC

