

MODEL: G8145-20

208-240VAC, 60HZ DEFROST TIME CONTROL



WARNING

RISK OF ELECTRICAL SHOCK OR FIRE

TURN POWER OFF AT MAIN PANEL BEFORE SERVICING THIS SWITCH OR THE EQUIPMENT IT CONTROLS.

USE 75°C COPPER CONDUCTORS ONLY.

REINSTALL SAFETY GUARD AFTER WIRING.

REFER TO INSTALLATION INSTRUCTIONS FOR ADDITIONAL WARNINGS.


OPERATING INSTRUCTIONS:

1) PLACE TRIPPERS IN 24 HOUR DIAL AT THE TIME OF DAY THAT THE SWITCH CONTACTS ARE TO BE REVERSE FROM WHAT IS SHOWN IN THE WIRING DIAGRAM.

(NOTICE: LEAVE AT LEAST 1 HOLE BETWEEN EACH ADJACENT TRIPPER)


2) SET TIME OF DAY BY TURNING KNOB COUNTER-CLOCKWISE.

3) SET DEFROST DURATION BY PUSHING DOWN AND ROTATING POINTER ON 2 HOUR KNOB.



INSERT
SCREWDRIVER
HERE TO REMOVE
TIMER MECHANISM
FROM CASE

DISCONNECT POWER BEFORE
REMOVING TIMER MECHANISM




NOTICE:
ROTATE
KNOB IN
COUNTER-
CLOCKWISE
DIRECTION
ONLY



151753

UL 873, UL917
CSA 24, CSA 177
REFRIGERATION
CONTROLLER

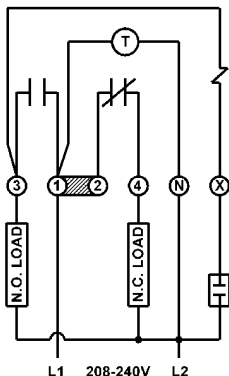

CYCLE LIMIT SWITCH
(TEMPERATURE OR PRESSURE CONTROL)
CLOSES ON TEMPERATURE OR PRESSURE
RISE

MAXIMUM CONTACT RATINGS		
40 AMPS	RESISTIVE	208-240 VAC
2 HP		208-240 VAC
1000 VA	PILOT DUTY	208-240 VAC

TIMING MOTOR 208-240V, 60Hz

WIRING DIAGRAM SHOWN IN NORMAL
POSITION DURING REFRIGERATION
CONTACTS 1-3 ARE OPEN
CONTACTS 2-4 ARE CLOSED

INTERMATIC INCORPORATED

7777 WINN RD., SPRING GROVE, IL 60081-9698 USA

MADE IN MEXICO